

UT-509D

-
-
-
-
-
-



1	EIA/TIA	RS-232C	RS-485/RS-422			
2			RS-422/RS-485			
3	RS-422	RS-485	600W			
4				2500Vrms	500VDC	DC-DC
5						
6	DC9-30V@60mA					
7			PWR	TXD	RXD	
8						
9	115.2Kbps	300m				
	38.4Kbps	2.4Km				
	9600bps	5Km				
10	110mm	100mm	25mm			
11	-40	85	5%	95%		
12	0-5,000	115200bps-9600bps				


3	(PIN)	
1		V+
2		V-
3		PGND

RS-485/RS-422

5	(PIN)		RS-422	RS-485
1		T/R+	(A+)	RS-485 (A+)
2		T/R-	(B-)	RS-485 (B-)
3		RXD+	(A+)	
4		RXD-	(B-)	
5		GND1		

RS-485/RS-422

5	(PIN)		RS-422	RS-485
1		T/R+	(A+)	RS-485 (A+)
2		T/R-	(B-)	RS-485 (B-)
3		RXD+	(A+)	
4		RXD-	(B-)	
5		GND2		

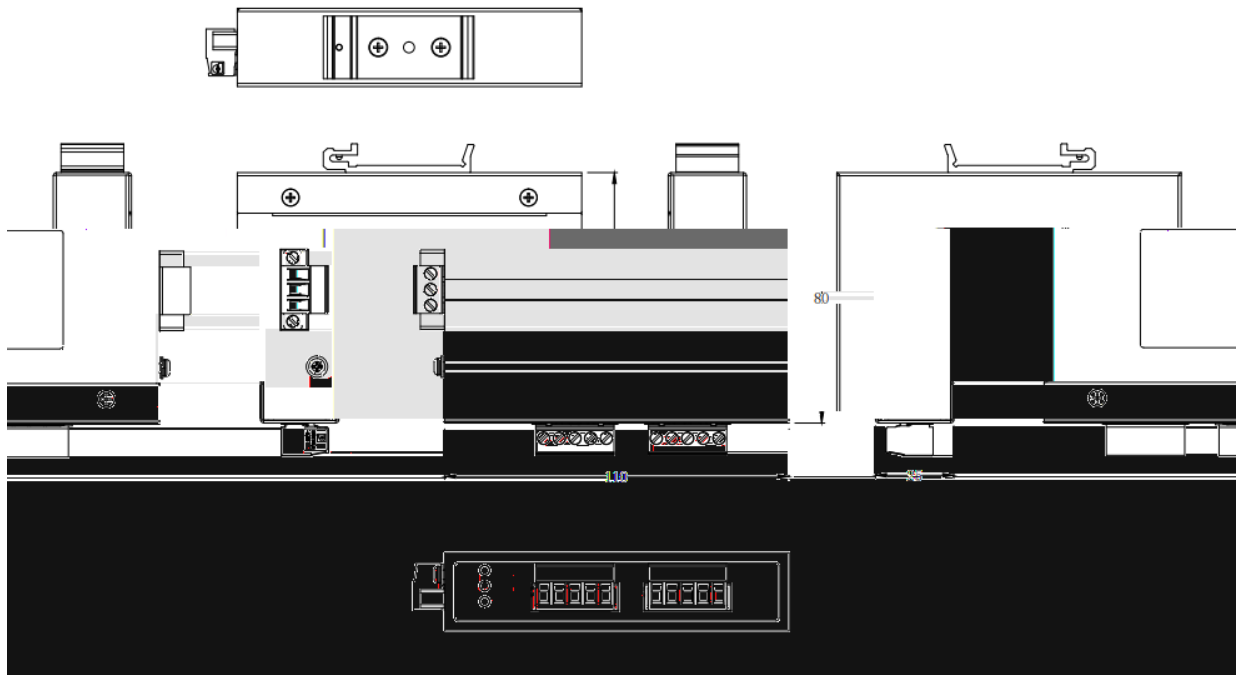

	1PC
	1PC



-40 +85 , 5% 95%