

UT-2788

" ()-*) 7: DEI 8 BD9: B

- I:
-
- d d 

I" --			" -"	
I" --		半)")")"	
I" --)" -" ((
I" --			*" ."))

(

- " ()-*) 7: DEI 8 BD9: B

)


- 1 RS-232/RS-485/RS-422 变
- 2 460Kbps
- 3 4KM 半 20KM
- 4 -40 +85 5% 95%
- 5 1310nm(1310nm(半
- 6 变 RS-232
RS-485/422
变 ST 变 SC/FC 变
- 7 RS-232 变 RS-232 变+/-15KV()ESD 115.2Kbps
- 8
- 9 RS-485/422 变 变 变 全 15KV(
)ESD 128

*

(PIN)		RS-422	RS-485
1	T/R+	(A+)	RS-485 (A+)
2	T/R-	(B-)	RS-485 (B-)
3	RXD+	(A+)	
4	RXD-	(B-)	
5	TXD	RS-232	
6	RXD	RS-232	
7	GND	RS-232	

		半	
	nm	1310	1310
	km	4	20
	dBm	-3 -10	-3 -7
	dBm()	-18	-18
	dBm	-3	-3
	dBm/km	0.35	0.35
	变	SC FC ST 变	
		460Kbps	
		/	
		AC/DC 100 240V/1W DC12-48V/1W	
		-40 85	
		-40 85	
		5% 90%	
		100mm×80mm×34.5mm	



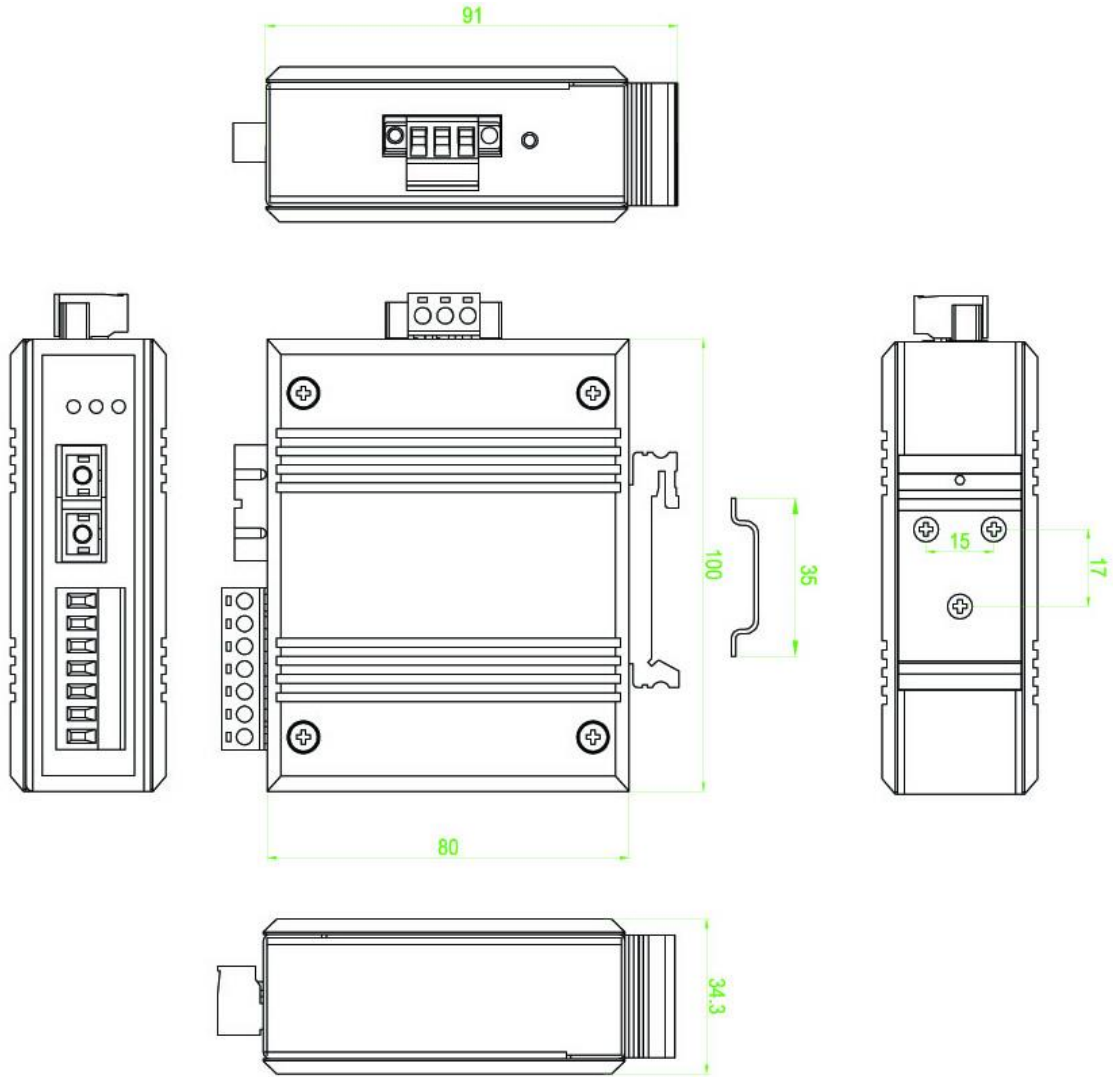

WOTTEK[®]

型号Model : UT-2788SM-SG

名称Product Name : RS-232/485/422 FIBER OPTIC MODEM

输入电压Input Voltage : AC/DC100~240V

电源功耗Power Consumption : 1W

This device complies with Part 15 of the FCC rules.
Operation is subject to the following conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received including interference that may cause undesired operation

CE FC EHS COMPLIANT

AC/DC

WOTTEK[®]

型号Model : UT-2788SM-SC-DC

名称Product Name : RS-232/485/422 FIBER OPTIC MODEM

输入电压Input Voltage : DC12~48V

电源功耗Power Consumption : 1W

This device complies with Part 15 of the FCC rules.
Operation is subject to the following conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received including interference that may cause undesired operation

CE FC EHS COMPLIANT

DC

半


	半
	1PC
	1PC
	3 PCS
	1PC
	1PC



-))*

/

-40 +85 , 5% 95%

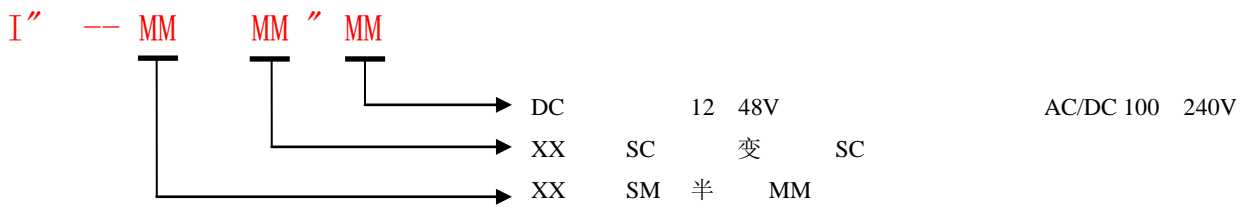

(

)

*