

UT-2209

RS-485 RS-485

1
1
1



1
1

UT-2209


1

1		EIA/TIA	RS-485		
2		RS-485			
		RS-485			
3		RS-485	600W		
			15KV ESD		
4		2500Vrms	500DC	.DC/DC	
5					
6)			PWR	TXD	RXD
7)					
8)		300BPS-115.2K BPS			
9)		89mm 73mm 22mm			
10)		-40 85	5%	95%	
11)		0-1200	115200bps-9600bps		

5.

RS-485输入端信号引脚分配

接线柱(PIN)	信号定义	信号说明
1	VCC	DC9-24V输入
2	GND	由源抽
3-4	T/R+	RS-485- 隔离输入
5	T/R-	RS-485- 隔离输出
6	T/R-	RS-485- 隔离输出

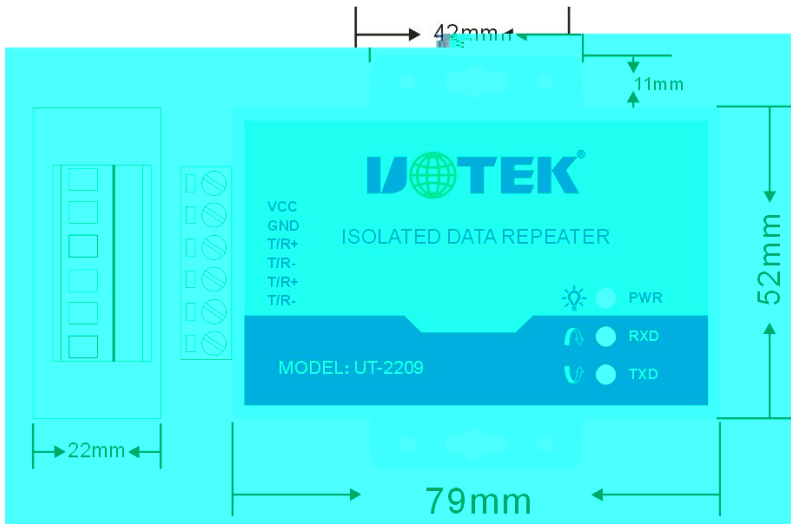



	1PCS
	1PCS
	1PCS
	1PCS
	1PCS
	1PCS



-40 +85 , 5% 95%