



UT-208

RS-232/RS-485/RS-422

工业级高性能光电隔离型接口转换器


说明书

一、概述

UT-208 RS-232C RS-422
 RS-485 RS-232 内 RS-
 422 RS-485 2500Vrms
 况作 作
 作 RS-422/RS-485 TVS
 TRANSIENT VOLTAGE SUPPRESSOR 况
 TVS TVS
 况
 作 况 LIGHTNING ESD 600W
 作
 作 RS-422/RS-485
 RS-232 DB9
 RS-232C RS-422 RS-485 DB9
 I/O
 况 仔 (RTS DTR)
 (RS-422) (RS-485)
 作
 不RS-232 仔
 UT-208
 RS-422 RS-485 300-115.2KBPS
 RS-232 RS-422 RS-232 RS-485


1	EIA/TIA	RS-232C	RS-485/
	RS-422		
2	RS-232	DB9	RS-422/
	RS-485	DB9	
3	RS-232	+/-15KV ESD	RS-422
	RS-485	600W	
4		2500Vrms	500DC
5			
6			PWR
	TXD		RXD
7			
8	115.2Kbps	300m	
	38.4Kbps	2.4Km	
	9600bps	5Km	
9	113mm	55mm	25mm
10	-40	85	5% 95%
11	0-5,000	115200bps	9600bps

四、硬件安装及应用

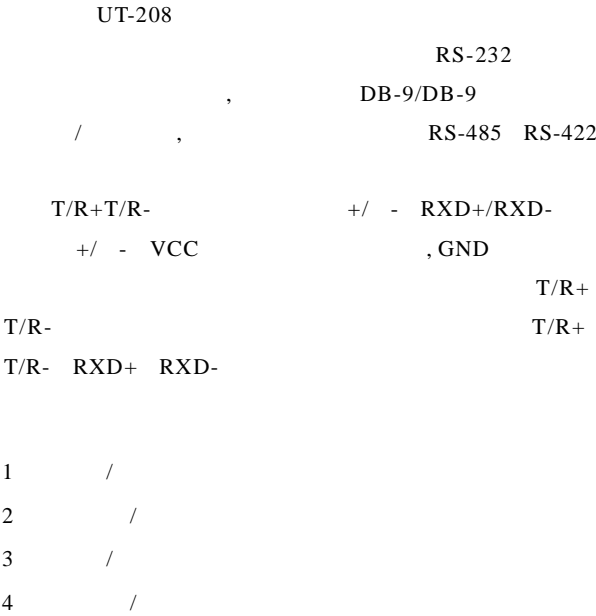

120 1/4W

五、通信连接示意图

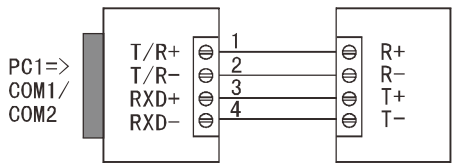

R+
R-
T+
T-

R+
R-
T+
T-

T/R+
T/R-
RXD+
RXD-

1

A RS-232
B RS-485/RS-422
C
D
E
F

2

A